


CLEANTYPE® WAVE CLASSIC

KSI-B10020 (KEYBOARD WITH COVER)
KPL-B10010 (KEYBOARD)

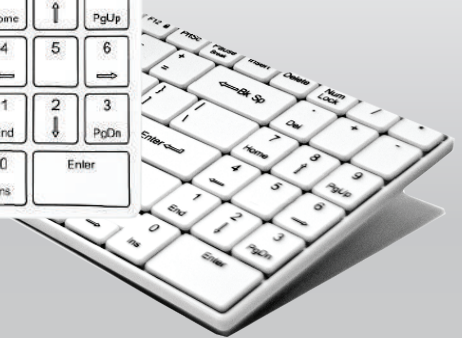

SPECIAL FEATURES

- IP68 rated medical keyboard
- Bluetooth 3.0 & USB dual connection features
- Antimicrobial flat keyboard with protective cover
- Fully washable and disinfectable
- Excellent tactile feeling
- Integrated Clean Mode for cleaning (Press Fn + F12)
- Supplement protective cover can be ordered separately GAA-XK16701
- Built-in Li-ion rechargeable battery

SPECIFICATION

Number of keys:	99 (US-Layout)	Cable length:	2 meters detachable USB cable
Keyswitch technology:	scissor	Operating temperature:	0°C ~ +55°C
Switching cycles:	approx. 2 mill. (per key)	Storage temperature:	-40°C ~ +70°C
Protection level:	IP68	Dimensions:	345(L) x 115(W) x 25(T) mm
Housing material:	hard plastic	Weight:	approx. 310 g
Housing colour:	white	Certification:	CE, FCC, RoHs
Interfaces:	USB & bluetooth	Warranty:	2 years
		Charging time:	3 hours (via USB)
		Standby time:	Approx 1400 hours

ORDER INFORMATION

Cat. No.	Product description	Colour	Layout
KSI-B10020	CleanType® Wave Classic With Protective Cover	White	US
KSI-B10020-DE	CleanType® Wave Classic With Protective Cover	White	German
KSI-B10020-AR	CleanType® Wave Classic With Protective Cover	White	Arabic
KSI-B10020-JP	CleanType® Wave Classic With Protective Cover	White	Japanese
KSI-B10020-TH	CleanType® Wave Classic With Protective Cover	White	Thai

Other layouts, configurations and interfaces on request.

SUPPLEMENT PRODUCTS

Cat. No.	Product description	Layout
GAA-XK16701	CleanType® Wave Classic Antimicrobial Protective Cover	US
GAA-XK16701-DE	CleanType® Wave Classic Antimicrobial Protective Cover	German
GAA-XK16701-AR	CleanType® Wave Classic Antimicrobial Protective Cover	Arabic
GAA-XK16701-JP	CleanType® Wave Classic Antimicrobial Protective Cover	Japanese
GAA-XK16701-TH	CleanType® Wave Classic Antimicrobial Protective Cover	Thai

OPERATING INSTRUCTIONS

For further details please refer to user manual.

CLEANING INSTRUCTION

For further details please refer to below link:

<http://www.gett-group.com/content/service-cleaning-instructions>

Precaution in battery handling

- Do not dry the keyboard with a heat source such as a microwave heating , dryer and radiator.
- Do not dispose the keyboard into a fire.
- Do not disassemble , damage , deform , modeify ,remove the internal battery from the keyboard.
- Do not use the keyboard with equipment which generate strong eletromagnetic radiation=.
- The positive and negative terminal of batteries should not be short circuited, or solder to other objects, if it is short circuited , stop use the device immediately.
- Should fluid leaked from the battery come in contact with human eye or skin, the effected surface should be washed with water immediately.
- Damaged battery or keyboard with abnormalities should not be use any further, and suggest to put to scrap.