



# EC200-BT

Atom




## Features

- Fanless, compact design for industrial applications
- Supports DDR3L SODIMM up to 8GB
- 2x 2.5" SATA drive bays




▶ 1 Vertical USB for securing data from unauthorized access (optional)


## Panel

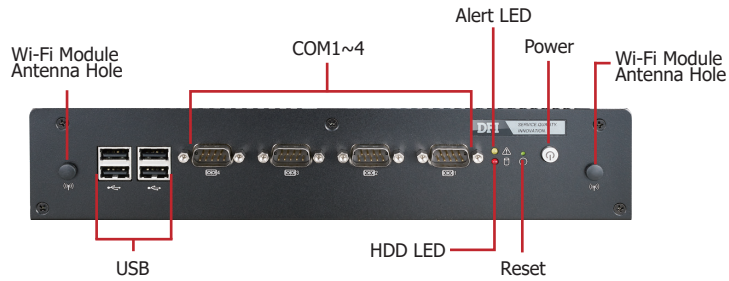


Front View

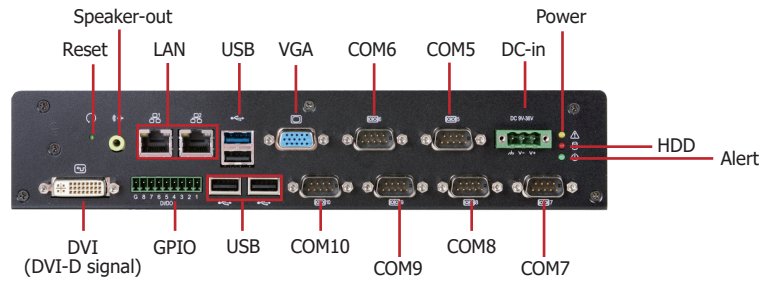

EC200-BTA881 Rear View

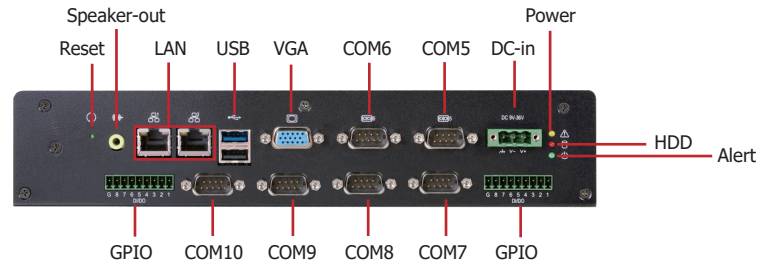

EC200-BTAG60 Rear View

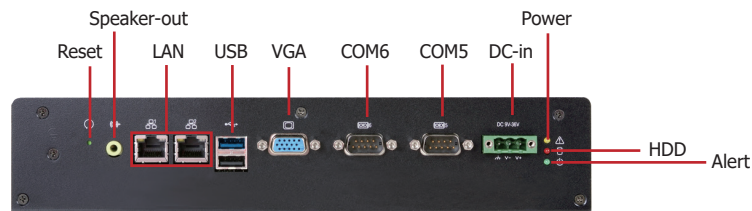

EC200-BT6060 Rear View

# EC200-BT

## ► Specifications \* Optional and is not supported in standard model. Please contact your sales representative for more information.

### PROCESSOR SYSTEM

- Intel® Atom™ E3845, Quad Core, 2M Cache, 1.91GHz, 10W
- 22nm process technology

### MEMORY

- Two 204-pin DDR3L SODIMM sockets
  - up to 8GB system memory
  - dual channel memory interface
- Supports DDR3L 1333MHz

### GRAPHICS

- Intel® HD Graphics
- Display ports: 1 VGA, 1 DVI (DVI-D signal)
- Supports 2 independent displays
- VGA: resolution up to 2560x1600 @ 60Hz
- DVI: resolution up to 1920x1080 @ 60Hz

### STORAGE

- 2 2.5" SATA drive bays
  - SATA 2.0 port with data transfer rate up to 3Gb/s
  - Standard: 1 SATA drive bay
  - Option: 2 SATA drive bays (Available upon request. Please contact your sales representative for more information.)
- Supports 1 mSATA module via the mini PCIe socket

### ETHERNET

- 2 Intel® WGI210AT PCI Express Gigabit Ethernet controllers
- Integrated 10/100/1000 transceiver
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab

### EXPANSION

- 1 Mini PCIe slot
  - Supports USB and PCIe signals
  - Supports mSATA, Wi-Fi or 3G\*
  - Supports half size or full size Mini PCIe card

### AUDIO

- Realtek® ALC888 High Definition Audio
- 2 watt, 4Ω power amplifier

### POWER

- Power input voltage: 9~36V DC-in

### ENVIRONMENT

- Temperature
  - Operating: 0°C~55°C (SSD/mSATA)
  - Operating: 0°C~50°C (HDD)
  - Operating: -10°C~70°C (wide-temp SSD, for EC200-BT6060 only)
  - Storage: -20°C~85°C
- Operating Vibration
  - IEC68-2-64 (HDD)
- Operating Shock
  - Half sine wave 15G, 11ms, 3 shock per axis

### CONSTRUCTION

- Aluminum + SGCC

### MOUNTING

- Wall/VESA mount
- Mounting brackets and screws\*

### DIMENSIONS

- 275mm x 59mm x 203mm (W x H x D)

### WEIGHT

- 3 kg

### OS SUPPORT

- Windows 7, WES 7, Windows 8.1, WES 8, Windows 10 IoT (64-bit)
- Linux (Distribution available upon request)

### WATCHDOG TIMER

- Watchdog timeout programmable via software from 1 to 255 seconds

### CERTIFICATION

- CE
- FCC Class A
- RoHS
- UL compliance

## ► System Models

Rear I/O Ports	EC200-BTA881	EC200-BTAG60	EC200-BT6060
DC-in power jack: 3-pole terminal block	1	1	1
Speaker-out: 2W 3.5mm audio jack	1	1	1
VGA: DB-15 D-sub	1	1	1
DVI (DVI-D signal)	1	0	0
LAN: RJ45	2	2	2
RS232 COM: DB-9 D-Sub	2	2	2
RS232/422/485 COM: DB-9 D-Sub	4	4	0
USB 2.0 Type A	3	1	1
USB 3.0 Type A	1	1	1
GPIO: 9-pole terminal block	8-bit	16-bit	0
Reset button	1	1	1
Power LED	1	1	1
HDD LED	1	1	1
Alert LED	1	1	1
Front I/O Ports	EC200-BTA881	EC200-BTAG60	EC200-BT6060
USB 2.0 Type A	4	4	4
RS232/422/485 COM: DB-9 D-Sub	4	4	4
Power button with indicator	1	1	1
Reset button	1	1	1
HDD LED	1	1	1
Alert LED	1	1	1
Wi-Fi module antenna hole	2	2	2



## EC200-BT

### ► Ordering Information

Model Name	Part Number	Description
<b>EC200-BTA881-45</b>	750-EC2000-F00G	Fanless, E3845, 2 LAN, 1 DVI, 1 VGA, 10 COM, 8-bit GPIO, 8 USB, RoHS
<b>EC200-BTAG60-45</b>	750-EC2000-G00G	Fanless, E3845, 2 LAN, 1 VGA, 10 COM, 16-bit GPIO, 6 USB, RoHS
<b>EC200-BT6060-45</b>	750-EC2000-H00G	Fanless, E3845, 2 LAN, 1 VGA, 6 COM, 6 USB, RoHS

### ► Optional Items

Optional Items	Part Number	Description
<b>Memory</b>	785-RSOD34G-L	SODIMM, DDR3L Module, 4GB, RoHS
	785-RSOD32G-L	SODIMM, DDR3L Module, 2GB, RoHS
<b>HDD</b>	785-H25500G	2.5" SATA HDD, 500GB, RoHS
	785-H25320G	2.5" SATA HDD, 320GB, RoHS
	785-S251TBG	2.5" SATA SSD, 1TB MLC, RoHS
	785-S25512G	2.5" SATA SSD, 512GB MLC, RoHS
	785-S25256G	2.5" SATA SSD, 256GB MLC, RoHS
	785-S25128G	2.5" SATA SSD, 128GB MLC, RoHS
	785-S25064G	2.5" SATA SSD, 64GB MLC, RoHS
	785-S251TBG-W	2.5" SATA SSD, 1TB MLC, Wide Temp, RoHS
	785-S25512G-W	2.5" SATA SSD, 512GB MLC, Wide Temp, RoHS
	785-S25256G-W	2.5" SATA SSD, 256GB MLC, Wide Temp, RoHS
	785-S25128G-W	2.5" SATA SSD, 128GB MLC, Wide Temp, RoHS
	785-S25064G-W	2.5" SATA SSD, 64GB MLC, Wide Temp, RoHS
	785-S25032G-W	2.5" SATA SSD, 32GB MLC, Wide Temp, RoHS
	785-S25016G-W	2.5" SATA SSD, 16GB MLC, Wide Temp, RoHS
785-S25008G-W	2.5" SATA SSD, 8GB MLC, Wide Temp, RoHS	
<b>mSATA</b>	785-MS128GMF	mSATA Card, 128GB MLC, RoHS
	785-MS64GMF	mSATA Card, 64GB MLC, RoHS
	785-MS32GMF	mSATA Card, 32GB MLC, RoHS
	785-MS16GMF	mSATA Card, 16GB MLC, RoHS
	785-MS08GMF	mSATA Card, 8GB MLC, RoHS
	785-MS04GMF	mSATA Card, 4GB MLC, RoHS
<b>Wi-Fi</b>	761-110091-000G	Wi-Fi Kit, RoHS
<b>Power Cord</b>	785-PWRD	Power Cord, Standards (USA/EUR/CH), 1.8m, RoHS
<b>Power Adapter</b>	671-106011-000G	60W, 19V/3.15A, Level 6, RoHS
	671-106013-000G	60W, 12V/5A (-30 to 70°C), Level 6, RoHS
	671-110003-100G	120W, 19V/6.31A, Level 6, RoHS
<b>Wall Mount</b>	785-EC3WMK	Wall Mount Kit
<b>VESA Mount</b>	785-EC2VAK	VESA Mount Kit

### ► Packing List

• 1 EC200 system unit
• 1 HDD drive bay kit
- 2 Brackets
- 1 SATA data/power cable
- 4 Bracket screws
- 4 HDD screws
• Terminal blocks
• 1 Quick Installation Guide