


MS-98E3

Mini-ITX with Intel® Atom™ Bay Trail for Multi-Displays, DC/ATX, Low-Power & Fanless Solution

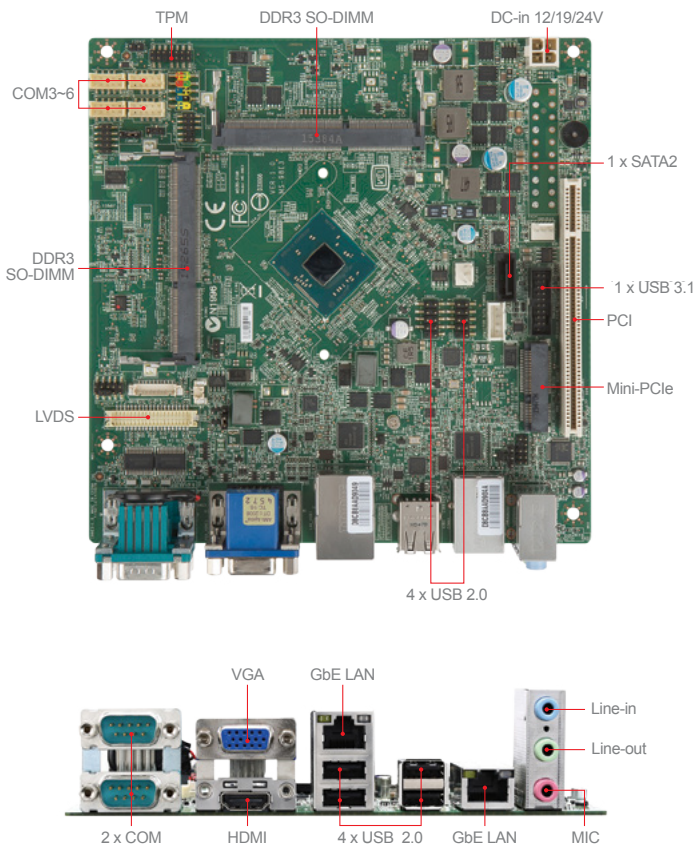

Features

- Intel® Bay Trail Series SoC
- 2 DDR3L 1333/1066 MHz SODIMM slots up to 8GB
- Dual independent displays: VGA, HDMI, LVDS
- 2 GbE LAN with RJ-45
- 1 PCI, 1 Mini-PCle (Full size, with mSATA) slots
- mSATA, SATA 2.0 for storage
- USB 3.2 Gen 1, 8 USB 2.0, 6 COM (1 RS485), GPIO, PS/2, Audio
- Wide Voltage DC-IN 12/19/24V(ATX Power by option)

Ordering Information

Part Number	Description
919-98E3-001	MS-98E3 10 Intel Bay Trail D sku-J1900, DC, 1*Mini PCI_E+2*DDR3L SO DIMM, 1*PCI, 1*mini PCIe (with msata function), 8*USB 2.0, 1*USB 3.0, 6*COM
919-98E3-002	MS-98E3 10 OPT: A Intel Bay Trail D sku-J1900, ATX-, 1*Mini PCI_E+2*DDR3L SO DIMM, 1*PCI, 1*mini PCIe (with msata function), 8*USB 2.0, 1*USB 3.0, 6*COM

Part Number	Description	Quantity
K10-3004215-V03	DC power cable, 160mm	1
K1D-1012064-V03	SATA cable, 200mm	1
E21-98E3020-C22	I/O shield	1
G71-SEDC113-X03	Driver CD	1

Specifications

Processor	CPU	Intel® Celeron® Processor J1900, QC, 10W Intel® Celeron® Processor N2930, QC, 7.5W
	Frequency	J1900, 2.0 GHz, up to 2.42 GHz N2930, 1.83 GHz, up to 2.16 GHz
	L2 Cache	2 MB
	CPU Type	BGA
	Chipset	Integrated
Memory	BIOS	AMI
	Technology	Dual-channel DDR3L 1333/1066 MHz
	Max. Capacity	Up to 8GB
Display	Socket	2 x 204-pin SO-DIMMs
	Controller	Intel® HD Graphics
	Graphic Memory	Depends on CPU
	LVDS	Dual Channel 24-bit (add chrontel 7511B chipset)
	VGA	1
	HDMI	1
	Multiple Display	2 independent displays
Display Interface	VGA up to 2560 x 1600 @60Hz HDMI up to 1920 x 1080 @60Hz LVDS up to 1920 x 1200 @60Hz	
Ethernet	Controller	2 x Intel® i210-AT GbE LAN
Audio	Controller	Realtek® ALC887 HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
TPM	Controller	Pin header
I/O Interface	USB	8 x USB 2.0 (4 x internal, 4 x rear) 1 x USB 3.1 Gen 1 (internal)
	Serial	6 x COM ports (COM1~2: rear, COM3~6: internal) COM1: RS-232/422/485, 0V/5V/12V COM2~6: RS-232, 0V/5V/12V
	PS/2	1 (Pin header)
	GPIO	8-bits (4 x GPI, 4 x GPO), 5V
Expansion Slot	PCI	1
	M.2	N/A
	Mini-PCle	1 x Full-size (w/ mSATA)
Storage	SATA	1 x SATA 2.0
	mSATA	1
Power Supply	DC	DC-in 12/19/24V
	ATX	ATX-Power 20P
Environment	Operating Temperature	0 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
	Storage Humidity	10 ~ 90%, non-condensing
Form Factor	Dimensions	170 x 170mm (Mini-ITX)
	Weight	0.37 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI
Software Platform	OS Support	Windows 7 (32/64-bit) Windows 8 (32/64-bit) Windows 10 (64-bit)

Optional Item

Part Number	Description
K14-1018003-V03	COM port cable, 300mm
K1B-3008012-E06	USB2.0 cable, 330mm

Industrial Computer
COM Express Board
Qseven Board
Pico-ITX Board
3.5" Board
EPIC Board
PICMG Board
Mini-ITX Board
Micro-ATX Board
ATX Board
Compact-Size
Compact-Size
Full-Size
Intel® SDV