

## CIR-S4DUSY3208G

DDR4 DIMM 3200MHz 8GB

### Description

CIR-S4DUSY3208G is a CMOS Double Data Rate IV (DDR4) Synchronous DRAM module, in Fine Ball Grid Array (FBGA) packages on a 288pin glass-epoxy substrate.

DDR4 unbuffered UDIMM series offers fully synchronous operations referenced to both rising and falling edges of the clock. The data paths are internally pipelined and 8-bit prefetched to achieve very high bandwidth.

### Specifications

Density	8GB
Pin Count	288pin
Type	Unbuffered
Dimensions	133.35mm x 31.25mm
ECC	Non-ECC
Component Config	1G x 8 bit
Data Rate	3200 MHz
CAS Latency	22
Voltage	1.2V
PCB Layers	8
Operating Temp.(TCASE)	0°C~+85°C
Module Ranks	Single Rank

### Features


- JEDEC Standard 288-pin Dual In-Line Memory Module
- Intend for PC4-3200 applications
- Inputs and Outputs are SSTL-12 compatible
- VDD=VDDQ = 1.2V±0.06V (1.14V~1.26V)
- Programmable CAS Latency(posted CAS): 11,12,13,14,15,16,17,18,19,20,21,22
- Low-Power auto self-refresh (LPASR)
- SDRAMs have 16 internal banks for concurrent operation (4 Bank Group of 4 banks each)
- Normal and Dynamic On-Die Termination for data, strobe and mask signals
- Data bus inversion (DBI) for data bus
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the MRS
- Selectable BC4 or BL8 on-the fly (OTF)
- Fly-By topology
- Terminated control, command and address bus
- RoHS and Halogen free

### Speed Grade

Frequency Grade	Data Transfer Rate	CAS Latency Support												CL-tRCD-tRP
		CL11	CL12	CL13	CL14	CL15	CL16	CL17	CL18	CL19	CL20	CL21	CL22	
DDR4-3200	PC4-25600	1600	1600	1866	1866	2133	2133	2400	2400	2666	2666	2933	3200	22-22-22

### Package Dimensions

Unit: mm

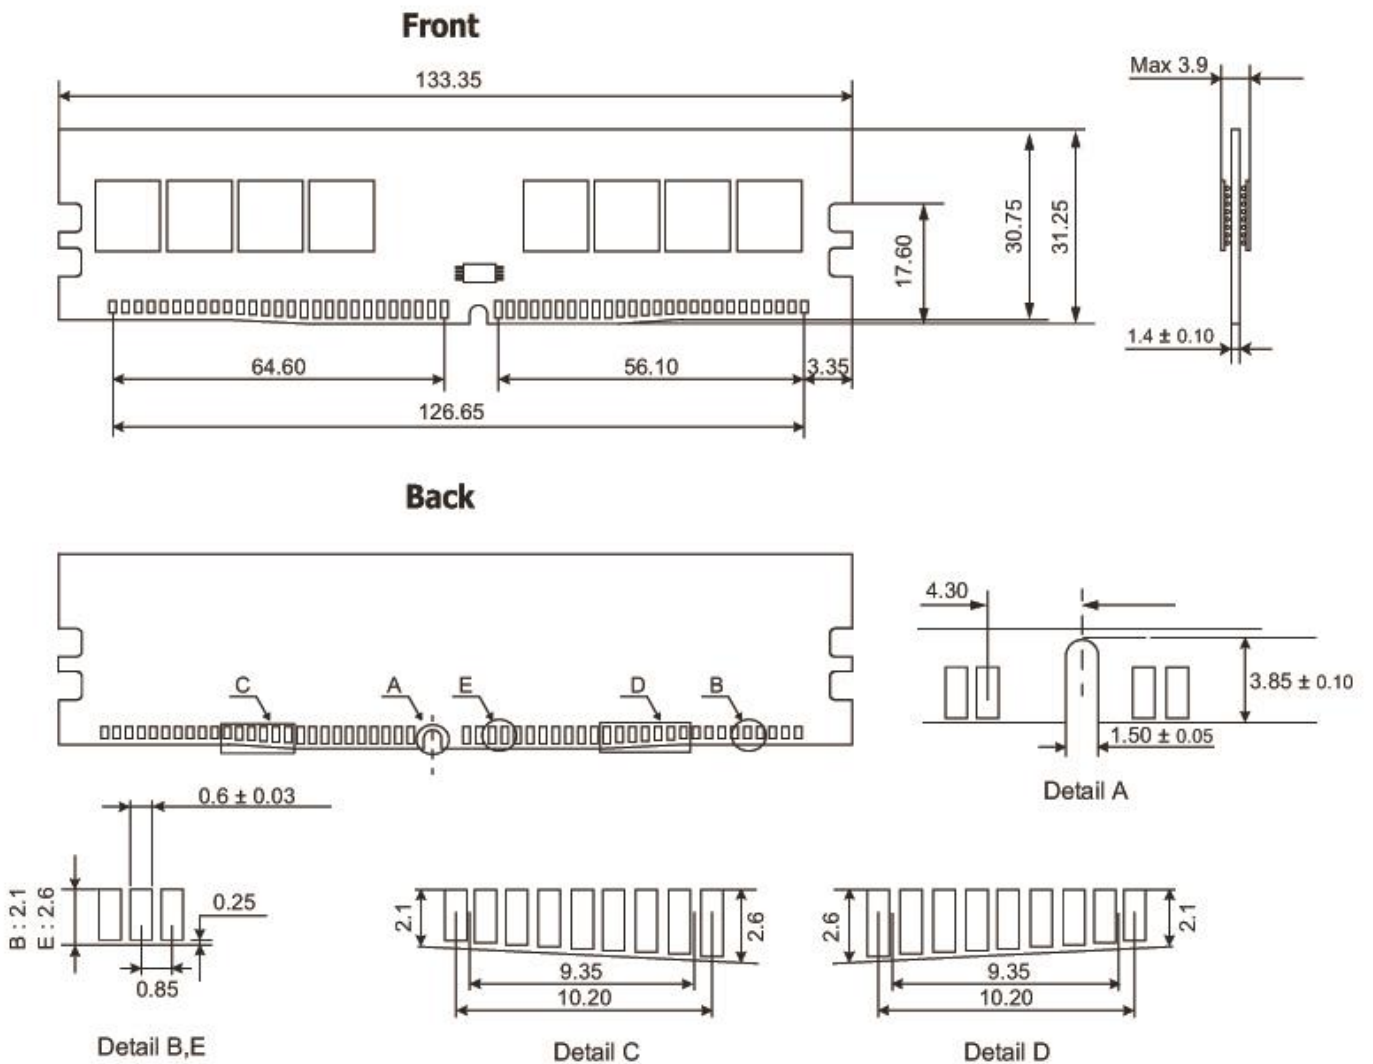

Tolerances : ± 0.15mm unless otherwise specified