



CMS101/CMS103

10th Gen Intel® Core™
Thin Mini-ITX

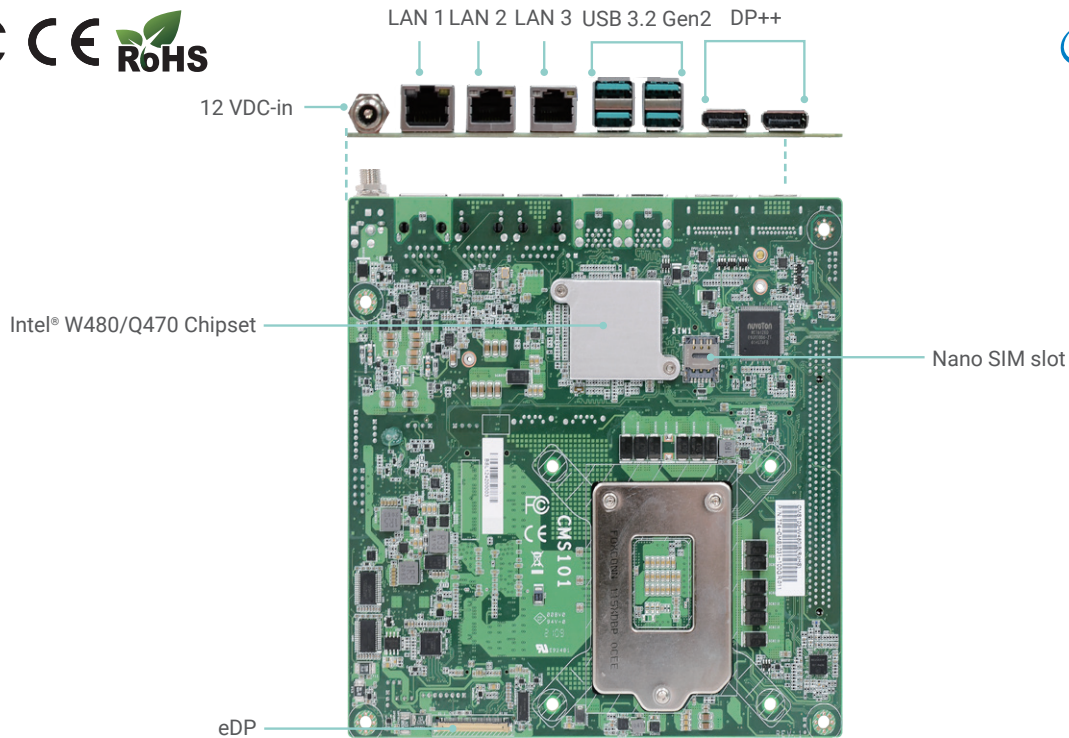

Bottom View

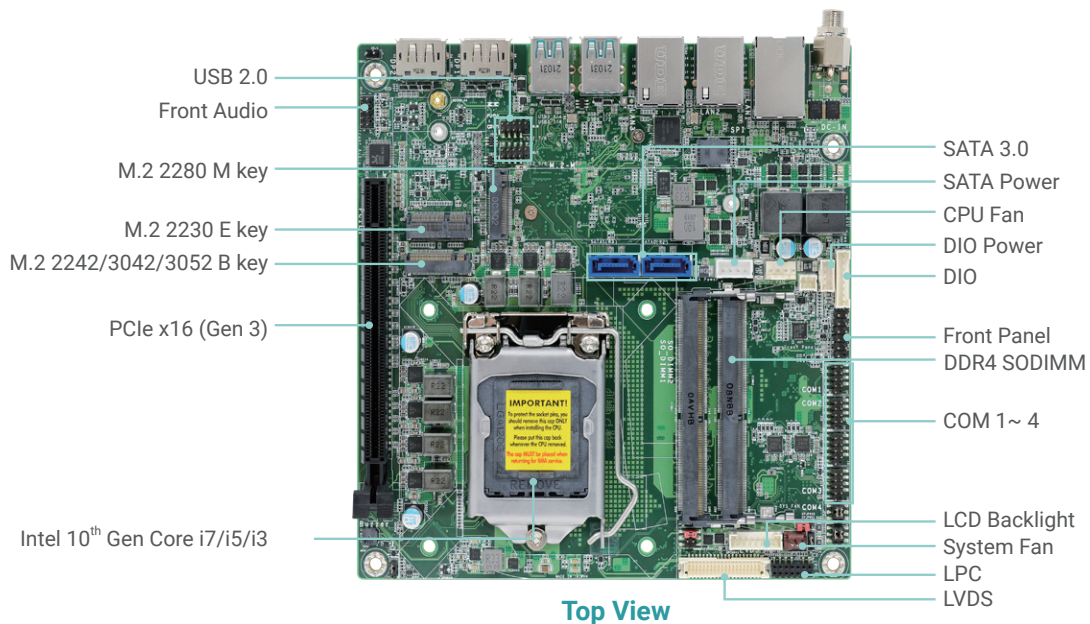

Top View

KEY FEATURES



DDR4

2 DDR4 SODIMM up to 64GB



4K High Resolution

Supports 4K/ 2K resolution



Triple Displays

2 x DP++, 1 LVDS/eDP



Multiple Expansion


1 x PCIe x16,
1 x M.2 2230 E Key,
1 x M.2 2280 M Key,
1 x M.2 2242/3042/
3052 B Key




Rich I/O

1 Intel 2.5GbE,
2 Intel GbE,
4 COM,
4 USB 3.2 Gen2,
4 USB 2.0

BLOCK DIAGRAM

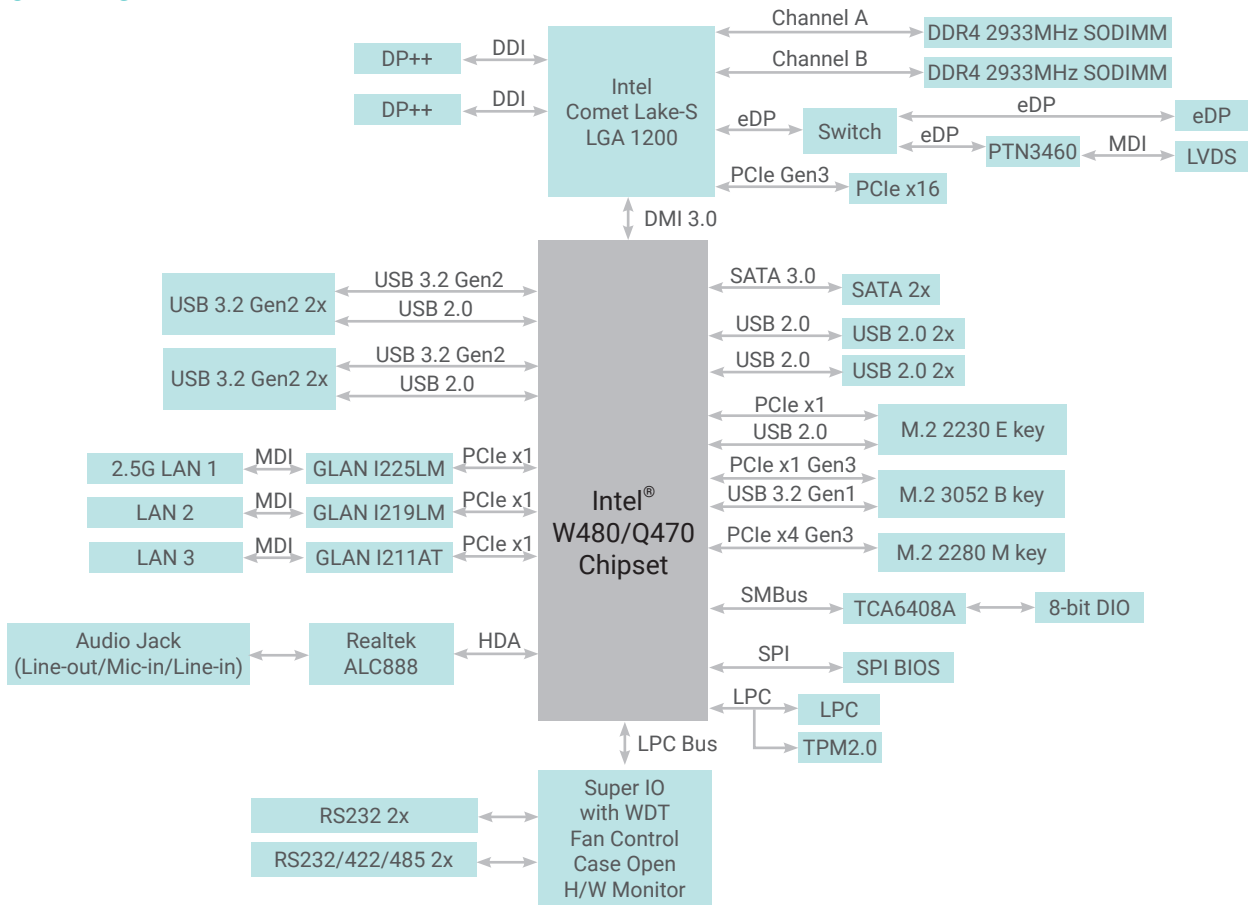

MECHANICAL DRAWING

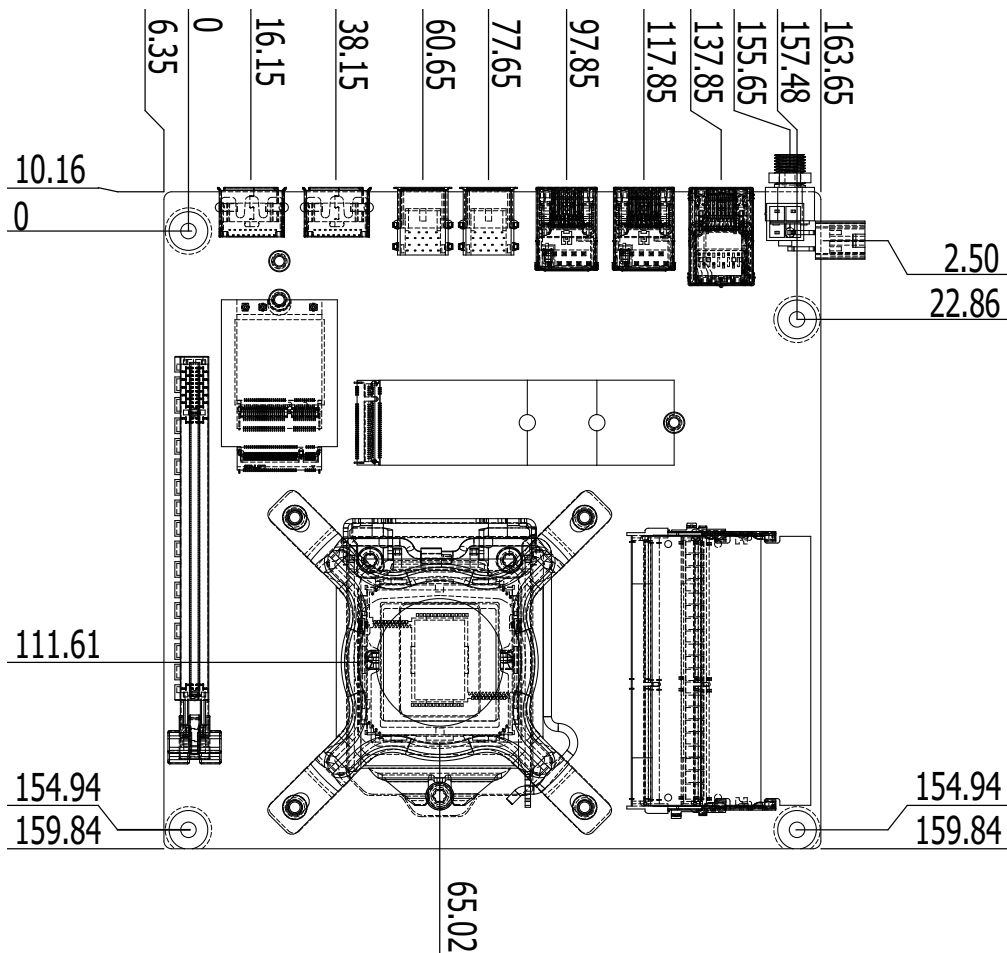

SPECIFICATION

System	Processor	10th Gen Intel® Xeon/Core™/Pentium/Celeron Processors, LGA 1200 Socket Intel® Xeon W-1290TE Processor (Core 10; Max speed 4.5GHz; TDP 35W) Intel® Xeon W-1270TE Processor (Core 8; Max speed 4.4GHz; TDP 35W) Intel® Xeon W-1250TE Processor (Core 6; Max speed 3.8GHz; TDP 35W) Intel® Core i9-10900E Processor (Core 10; Max speed 4.7GHz; TDP 65W) Intel® Core i9-10900TE Processor (Core 10; Max speed 4.5GHz; TDP 35W) Intel® Core i7-10700E Processor (Core 8; Max speed 4.5GHz; TDP 65W) Intel® Core i7-10700TE Processor (Core 8; Max speed 4.4GHz; TDP 35W) Intel® Core i5-10500E Processor (Core 6; Max speed 4.2GHz; TDP 65W) Intel® Core i5-10500TE Processor (Core 6; Max speed 3.7GHz; TDP 35W) Intel® Core i3-10100E Processor (Core 4; Max speed 3.8GHz; TDP 65W) Intel® Core i3-10100TE Processor (Core 4; Max speed 3.6GHz; TDP 35W) Intel® Pentium G6400E Processor (Core 2; Max speed 3.8GHz; TDP 65W) Intel® Pentium G6400TE Processor (Core 2; Max speed 3.2GHz; TDP 35W) Intel® Celeron G5900E Processor (Core 2; Max speed 3.2GHz; TDP 65W) Intel® Celeron G5900TE Processor (Core 2; Max speed 3.0GHz; TDP 35W)	
	Chipset	Intel® W480/Q470 Chipset	
	Memory	Two 260-pin SODIMM up to 64GB	Dual Channel DDR4 2933MHz
	BIOS	AMI SPI 266Mbit	
	Graphics	Controller	Intel® UHD Graphics 630 (only Pentium G5400/Celeron G4900 support 610)
Feature		OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: AVC/H.264, MPEG2, JPEG, HEVC/H265, VP8, VP9	
Display		2 x DP++ 1 x LVDS/eDP	DP++: Resolution up to 4096x2304 @60Hz LVDS: resolution up to 1920x1200 @ 60Hz eDP: resolution up to 4096x2160 @ 60Hz
Triple Displays		DP++ + DP++ + LVDS/eDP	
Expansion	Interface	1 x PCIe x16 (Gen 3) 1 x M.2 2230 E Key (USB/PCIe x1) 1 x M.2 2280 M Key (PCIe Gen3 x4) 1 x M.2 2242/3042/3052 B Key (PCIe Gen3 x1/USB 3.2 Gen1 SATA singal)	
Audio	Audio Codec	Realtek ALC888/887	
Ethernet	Controller	1 x Intel® I225LM PCIe(10/100/1000/2.5G speeds) 1 x Intel® I219LM PHY(10/100/1000 speeds), support vPro/AMT 1 x Intel® I211AT PCIe(10/100/1000 speeds)	
Rear I/O	Ethernet	1 x 2.5GbE (RJ-45) 2 x GbE (RJ-45)	
	USB	4 x USB 3.2 Gen2 (dual type-A connector)	
	Display	2 x DP++	
	Audio	1 x Audio Combo Jack	
Internal I/O	Serial	2 x RS-232/422/485 (2.0mm pitch) 2 x RS-232 (2.0mm pitch)	
	USB	4 x USB 2.0 (2.0mm pitch)	
	Display	1 x LVDS header 1 x eDP connector	
	Audio	1 x Front Audio (2.0mm pitch)	
	SATA	2 x SATA 3.0 (up to 6Gb/s) 1 x SATA Power	RAID 0/1/5/10 (w/ M.2 Key-M/B slot + 2 SATA Conn.)
	DIO	1 x 8-bit DIO 1 x DIO Power	
	LPC	1 x LPC	
	SMBus	1 x SMBus	
	Watchdog Timer	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds
Security	TPM	dTPM2.0	
Power	Type	Single 12V +/-10% DC (CMS101)	Wide Range 15~36V (CMS103)
	Connector	DC-in Jack Right Angle Connector (4-pin) (available upon request) Straight Type Connector (4-pin) (available upon request)	
	Consumption	TBD	
	RTC Battery	CR2032 Coin Cell	
OS Support	Microsoft	Windows 10 IoT Enterprise 64-bit	
	Linux	Linux	
Environment	Temperature	Operating: -5 to 65°C Storage: -40 to 85°C	
	Humidity	Operating: 5 to 90% RH Storage: 5 to 90% RH	
	MTBF	TBD	
Mechanism	Dimensions	Mini-ITX Form Factor , 170mm (6.7") x 170mm (6.7")	
	Height	PCB: 1.6mm	Top Side: TBD, Bottom Side: TBD
Certification	Certification	CE, FCC, RoHS	

PACKING LIST

1 CMS101/CMS103 motherboard	
1 Serial ATA data with power cable (Length: 500mm)	332-553001-005G
1 COM port cable (Length: 250mm, 1 x COM port)	A81-015011-001G

OPTIONAL ITEMS

COM port cable (Length: 250mm, 1 x COM ports)	A81-015011-001G
Serial ATA data cable (Length: 500mm)	332-553001-005G
Thermal solution (For 35W, Height: 29.4mm)	A71-103004-000G
Thermal solution (For 65W, Height: 45mm)	A71-103005-000G
DT122 Chassis	761-DT1220-200G