

WM343





microATX

Features

- Wallmount Chassis for microATX motherboard
- Designed for ATM application
- Up to 2x 3.5"/2.5" SATA drive bays
- Optional optical drive bay
- Supports up to 4 expansion slots



Panel




Front View



Rear View

Dimensions

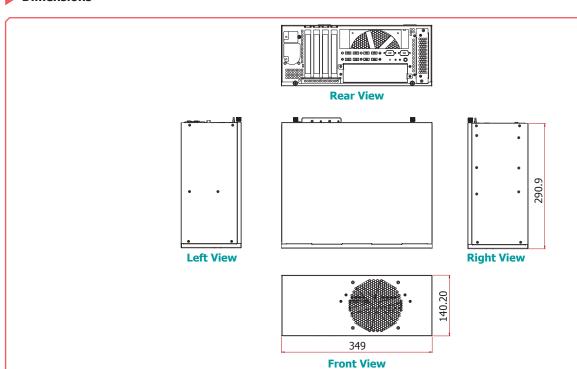


0-

Specifications

STORAGE	External	1 or 2 x 3.5"/2.5" SATA Drive Bays (1 x 3.5" SATA drive bay, by default)		
		1 x 5.25" Optical Drive Bay (available upo	on request)	
EXPANSION		4 x Expansion Slot	· ·	
LED	Indicators	1 x Power LED		
		1 x HDD LED		
1/0	Rear	2 x DB-9 Cutout		
		8 x USB 2.0 Cutout		
	Buttons	1 x Power Button		
COOLING	Fan	1 x System Fan		
POWER	Supply	Flex ATX 250W		
MECHANISM	Construction	Sheet Metal		
	Mounting	Wall Mount		
	Dimensions (WxHxD)	349mm x 140.2mm x 290.9mm (13.74" x 5.52" x 11.45")		
	Weight	TBD		
ENVIRONMENT	Operating Temperature	0 to 50°C		
	Storage Temperature	0 to 60°C		
	Relative Humidity	5 to 95% RH (non-condensing)		
STANDARDS AND	Shock	Operating: 3G	Non-operating: 5G	
CERTIFICATIONS	Vibration	Operating: Random 5~500Hz 0.5G	Non-operating: Sine 10~500Hz 1.5G	
	Package Drop	ISTA Project 1A		
	Certification	CE, FCC Class A, RoHS		

WM343

► Wall Mounting

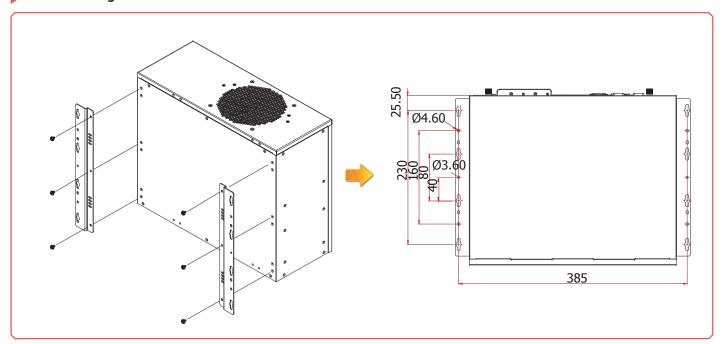

Ordering Information

Model Name	Part Number	Description
WM343	7A0-WM3430-000G	WM343 Chassis, w/o Optical Drive Bay

Optional Items

Optional Items	Part Number	Description
2.5" HDD/SSD Support	531-510360-000G	One F3 x5 Copper Standoff, RoHS (note: one bay needs 4 pcs of standoff)
Power Cord	785-PWRD	Power Cord, Standards (USA/EUR/CH), 1.8m, RoHS
Wall Mount	761-WM3410-000G	WM343/WM341 Wall Mount Kit, RoHS

Packing List

- 1 WM343 Chassis
- 1 SATA Data Cable (Length: 650mm)
- 4 HDD Screws
- 1 250W PSU
- 1 System Fan