


ACO-6000-8L

Surveillance Applied System with LGA 1151 socket for 6th Gen. Intel® Core™ i7/i5/i3 or Pentium® / Celeron® Desktop Processor, 10x LAN

FEATURES

- LGA 1151 socket for 6th Gen. Intel® Core™ i7/i5/i3 or Pentium® / Celeron® Desktop Processor
- Intel® Q170 Chipset
- 2x 260-pin DDR4 SODIMM. Max up to 32GB
- Triple independent display supported by 1x DVI-I and 2x DisplayPort
- 10x Intel® GbE (w/ 2x supporting Wake-on-Lan and PXE)
- 4x 2.5" SATA HDD bay and 2x mSATA supporting RAID 0, 1, 5, 10
- 3x Full-size mini PCIe for communication or expansion modules, 3x SIM socket
- 5x RS-232/422/485 (w/ 3x internal), 6x USB 3.0, 2x USB 2.0 (internal)
- 8x DI + 8x DO with Isolation
- 9 to 48VDC wide range power input supporting AT/ATX mode
- -25°C to 70°C extended operating temperature
- Power ignition management

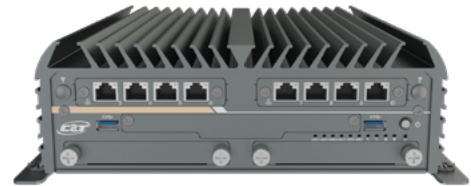

SPECIFICATIONS

SYSTEM

| | |
|-------------------------|---|
| Processor | Support 6 th Gen Intel® Core™ i3 / i5 / i7 Desktop Processor (LGA 1151) - 6 th Gen Intel® Core™ i7-6700TE, Quad Core, 8MB cache, up to 3.4 GHz - 6 th Gen Intel® Core™ i5-6500TE, Quad Core, 6MB Cache, up to 3.3 GHz - 6 th Gen Intel® Core™ i3-6100TE, Dual Core, 4MB Cache, 2.7 GHz - Intel® Pentium G4400TE, Dual Core, 3MB Cache, 2.4 GHz - Intel® Celeron G3900TE, Dual Core, 2MB Cache, 2.3 GHz |
| System Chipset | Intel® Q170 Express Chipset |
| LAN Chipset | GbE1: Intel® I210-AT (Support Wake-on-LAN and PXE) GbE2: Intel® I219LM (Support Wake-on-LAN and PXE) GbE3~GbE10: Intel® I350-AM4 |
| Audio Codec | Realtek ALC888S |
| System Memory | 2x 260-Pin DDR4 1866/2133MHz SODIMM. Max. up to 32GB |
| BIOS | AMI 128Mbit SPI BIOS |
| Watchdog | Software Programmable Supports 1~255 sec. System Reset |
| DISPLAY | |
| VGA | Yes (by optional split cable) |
| DVI | 1x DVI-I |
| DisplayPort | 2x DisplayPort |
| Multiple Display | Triple Display |
| STORAGE | |
| SSD/HDD | 2x Internal 2.5" SATA HDD Bay 2x Removable 2.5" SATA HDD Bay Support RAID 0, 1, 5, 10 |
| mSATA | 2x mSATA (Shared by 2x Mini PCIe) |
| SIM Socket | 2x External SIM socket 1x Internal SIM socket |
| EXPANSION | |
| Mini PCI Express | 3x Full-size Mini PCIe |
| OPERATING SYSTEM | |
| Windows | Windows 10, Windows 8.1, WES8.1, Windows 7, WES7 |
| Linux | Linux kernel 4.X |

I/O

| | |
|--------|---|
| COM | 2x RS-232/422/485 3x RS-232/422/485 (internal) |
| USB | 6x USB 3.0 2x USB 2.0 (internal) |
| LAN | 2x GbE RJ45 8x GbE RJ45 (module) |
| Audio | 1x Mic-in, 1x Speaker-out |
| DIO | 8 in / 8 out (Isolated) |
| Others | 6x WiFi Antenna Holes 1x Power Switch, 1x AT/ATX Switch, 1x Remote Power On/Off |

POWER

| | |
|------------------------|--|
| Power Mode | AT, ATX |
| Power Supply Voltage | 9~48VDC |
| Power Ignition Sensing | Power Ignition Management |
| Power Connector | 3-pin Terminal Block |
| Power Adaptor | Optional AC/DC 24V/5A, 120W |
| Power Protection | OVP (Over Voltage Protection) OCP (Over Current Protection) Reverse Protection |

ENVIRONMENT


| | |
|---------------------------|--|
| Operating Temp. | -25°C to 70°C |
| Storage Temp. | -30°C to 85°C |
| Relative Humidity | 10% to 95% (non-condensing) |
| Vibration | With SSD: 5 Grms, 5 - 500 Hz, 0.5 hr/axis With HDD: 1 Grms, 5 - 500 Hz, 0.5 hr/axis |
| Shock | With SSD: 50G, half sine, 11ms |
| Standards / Certification | CE, FCC Class A, E-Mark, EMC Conformity with EN50155 & EN50121-3-2 |

PHYSICAL


| | |
|--------------|---|
| Construction | Extruded Aluminum with Heavy Duty Metal |
| Dimension | 240 (W) x 261 (D) x 79 (H) mm |
| Weight | 4.24 kg |
| Mounting | Wall Mounting |

EXTERNAL I/O MECHANICAL LAYOUT

Front Panel

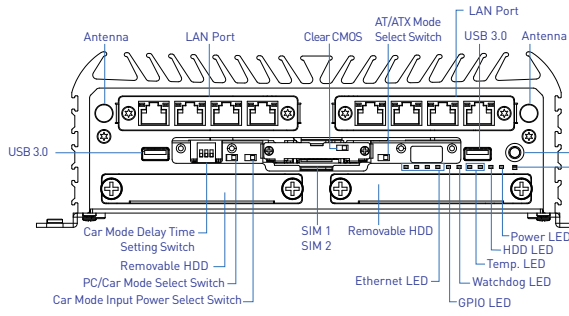


Rear Panel

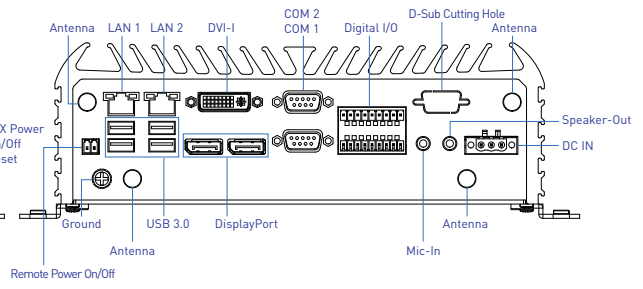

DIMENSION

Unit: mm

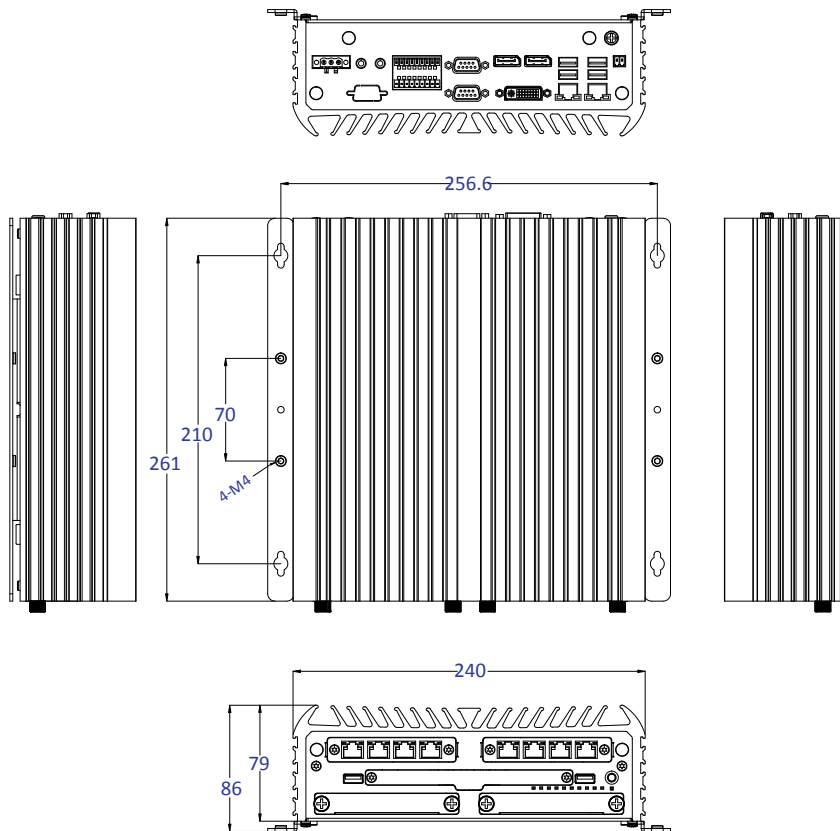

AVAILABLE MODELS

| MODEL NO. | DESCRIPTION |
|-------------|--|
| ACO-6000-8L | Surveillance Applied Fanless System with LGA 1151 for Intel® 6 th Gen Processor and Q170 PCH, 10x LAN |

OPTIONAL ACCESSORIES

| MODEL NO. | DESCRIPTION |
|-------------|---|
| 1-E09A12002 | Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug 5.0mm Pitch |
| SFICBL022 | Power Cord, 3-pin US Type, 180cm |
| 1-TPCD00002 | Power Cord, European Type, 180cm |
| 1-TPCD00001 | Power Cord, 3-pin UK Type, 180cm |

PACKING LIST

- 1x ACO-6000 Series Embedded System
- 1x Utility DVD Driver
- 1x Wall Mount Kit
- 1x Accessory Kit
- 1x DVI to VGA Adapter