



31610CW / 31385AW



31847CW



31847NX



31380A

## MIRO-3 (3 Layers) DIN-Rail Mounted Embedded Series

### Excellent heat-dissipating DIN-Rail mounted System

Application :  
Facility monitoring / Automation control / Transportation

DIN-Rail munted kit. (Option)

#### Technical Data :

- Dimension 90.9 H x 178 W x 116D mm
- Material Aluminum
- Color Silver
- Weight 1.75 Kg (Incl. M/B)
- Storage Space 1 x 2.5" SSD

M/B information: ( Please refer to M/B specification )



CPU Type	M/B Model	VGA	DVI / HDMI	COM	LAN	USB	Audio	Operation Temp	
								Industry mSATA	Industry SSD
Intel® Skylake / Kaby Lake i3 / i5 / i7 Celeron CPU	31610CW	1	DVI	6	2	4	-	60°C	-
Intel® Bat-Trail E3825 / E3845 / J1900	31385AW/CW	1	DVI	6	2	4	-	70°C	70°C
	31380A/CW	1	HDMI	6	2	4	Line out / Mic-in	70°C	70°C
Intel® Ivy Bridge 1047 UE 1.4GHz, i3, i7	31847CW	1	DVI & HDMI	5	2	4	Line out / Mic-in	70°C	70°C
	31847NX	1	HDMI	2	1+4xPoE	3	Line out / Mic-in	70°C	70°C
Intel Cedarview-M N2600 / 2800	31268A/CW	1	-	6	2	4	Option	70°C	70°C


#### More Functions

3G / 4G	Wi-Fi	GPS	1~4 Video-IN	-
Optional LAN	Parallel Port	DC +9V~+36V	COM	DIO


The above available functions outline the possibility with system, for more information please contact us.

#### Dimension



31380A





31847CW



31385AW/C ; 31610CW



31847NX

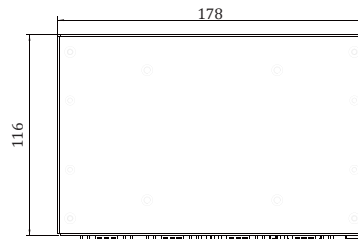

31268CW

