# Apacer

## The Most **Reliable** Storage For Industries

## SM230-25





## Apacer

## SM230-25

#### **Overview**


Apacer's SM230-25 is a well-balanced solid-state disk (SSD) drive with standard form factor and great performance. Designed in SATA 6.0 Gbps interface, the SSD is able to deliver exceptional read/write speed, making it the ideal companion for heavy-loading industrial or server operations.

In regard of reliability, the drive comes with various implementations including powerful hardware ECC engine, power saving modes, wear leveling, flash block management, S.M.A.R.T., TRIM, and power failure management.

Last but not the least, with Advanced Encryption Standard (AES) and Trusted Computing Group (TCG) Opal support, SM230-25 ensures data security and provides users with a peace of mind knowing their data is safeguarded against unauthorized use at all times.



- · Built-in hardware ECC
- · Global Wear Leveling
- · Flash bad-block management
- S.M.A.R.T.
- · Power Failure Management
- Device Sleep
- ATA Secure Erase
- TRIM
- Support TCG Opal 2.0/AES 256-bit encryption







## **Specifications**

Model	SM230-25
Interface	SATA 3.0 (6Gb/s)
Connector	(7+15) pin male
Form Factor	2.5"
NAND Flash Type	MLC
Capacity	With AES 256 support: 32GB~1TB With TCG Opal 2.0 support: 32GB~512GB
External DRAM	No
Sustained Read Performance (MB/sec)	Up to 530
Sustained Write Performance (MB/sec)	Up to 520
ECC Engine	Built-in 40-bit per 1K bytes BCH ECC
IOPS (4K Random Write)	65K
Standard Operating Temperature ( °C )	0~+70
Extended Operating Temperature ( °C )	-40 ~ + 85
Storage Temperature ( °C )	-40 ~ + 100
Shock	Operation: 50G, 11ms Non-operation: 1500G, 0.5ms
Vibration	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G)  Non-operation: 4.02 Grms, 15 ~ 2000 Hz/sine (compliant with MIL-STD-810G)
Operating Voltage	5.0 V±5%
Power Consumption	Active mode: 500 mA / Idle mode: 95 mA
Dimension (L x W x H )	7mm:100.00 x 69.85 x 6.90mm
MTBF (hours)	>1,200,000



### **Mechanical Specification**

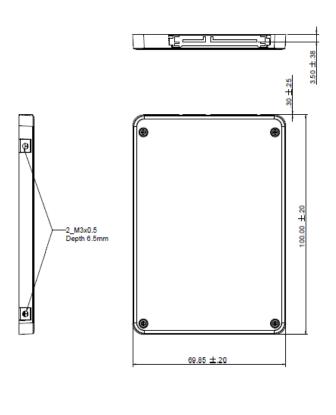

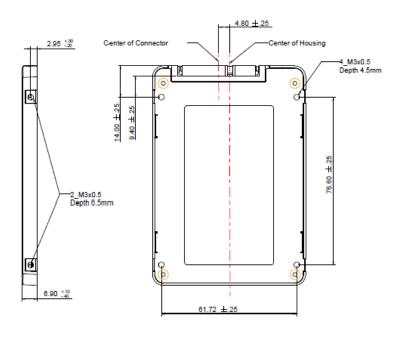

Unit: mm Tolerance: ±2

### For more information, contact your Apacer representative

#### **Global Presence**

Taiwan (Headquarters) Apacer Technology Inc. Tel: +886-2-2267-8000

Fax: +886-2-2267-2261

Apacer Technology Corp. Tel: +81-3-5419-2668 Fax: +81-3-5419-0018

Apacer Technology B.V. Tel: +31-40-267-0000

Fax: +31-40-290-0686

Apacer Technologies Pvt. Ltd.

Tel: +91-80-41529061~3

Fax: +91-80-41700215

Apacer Memory America, Inc. Tel: +1-408-518-8699

Fax: 1-510-249-9551

Apacer Electronic(Shanghai) Co., Ltd.

Tel: +86-21-6228-9939