

## The Most **Reliable** Storage For Industries

## UDM2A (Type C)






industrial.apacer.com

# Apacer

## UDM2A (Type C)

### Overview

Apacer's UDM2A is a high performance, highly reliable, high endurance USB2.0 flash disk module in a small form factor designed for embedded applications or the system as a boot drive . The device built with premium SLC delivers the data integrity and highest endurance in a wide rage of platform.



\*The actual available memory on the device is less than what is listed on the package. This is due to small discrepancies in file formats and algorithms used by various operating systems. In addition, a portion of memory space is reserved for system files and data sectors for better performance.

### Feature

- Built-in hardware ECC
- Global wear-leveling
- Flash bad-block management
- S.M.A.R.T.
- Lock switch design for write-protection(Optional)



industrial.apacer.com


## Specifications

Model	UDM2A (Type C)
Interface	USB2.0
Connector	10 pin USB(2x5) female header in 2.54mm
Form Factor	USB Disk Module
Transfer Mode	_
NAND Flash Type	SLC
Capacity	256MB~32GB
Sustained Read Performance (MB/sec)	Up to 44
Sustained Write Performance (MB/sec)	Up to 41
ECC Engine	Built-in 72-bit per 1K bytes BCH ECC
Standard Operating Temperature ( °C )	0 ~ + 70
Extended Operating Temperature ( °C )	-40 ~ + 85
Storage Temperature ( °C )	-40 ~ + 100
H/W Write Protect	Optional
Shock	Operation: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operation: Acceleration,1,500(G)/0.5(ms)/half sine (compliant with MIL-STD- 883K)
Vibration	Operation: 7.69(Grms), 20~2000(Hz)/random (compliant with MIL-STD-810G) Non-operation: 4.02(Grms), 15~2000(Hz)/random (compliant with MIL-STD-810G)
Operating Voltage	5.0 V ± 5%
Power Consumption	Active mode: 110 mA & Idle mode:45 mA
Dimension (L x W x H )	37.8 x 26.65 x 10.76 mm
MTBF (hours)	>2,000,000



industrial.apacer.com

### **Mechanical Specification**

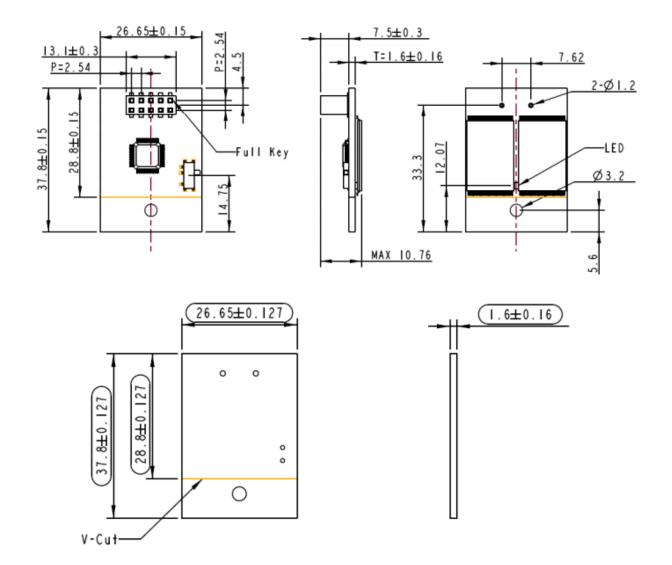

Unit: mm

#### For more information, contact your Apacer representative

#### **Global Presence**

Taiwan (Headquarters) Apacer Technology Inc. Tel: +886-2-2267-8000 Fax: +886-2-2267-2261

#### Japan

Apacer Technology Corp. Tel: +81-3-5419-2668 Fax: +81-3-5419-0018

#### Europe Apacer Technology B.V. Tel: +31-40-267-0000 Fax: +31-40-290-0686

India

Apacer Technologies Pvt. Ltd. Tel: +91-80-41529061~3 Fax: +91-80-41700215 U.S.A. Apacer Memory America, Inc. Tel: +1-408-518-8699 Fax: 1-510-249-9551

#### China

Apacer Electronic(Shanghai) Co., Ltd. Tel: +86-21-6228-9939