

2014

Mainboard

Product Launch Guide

--[NLH61-6C]

NL Series Motherboard




Jetway Information Co., Ltd.


www.jetway.com.tw

DATE: , 2014-3-6



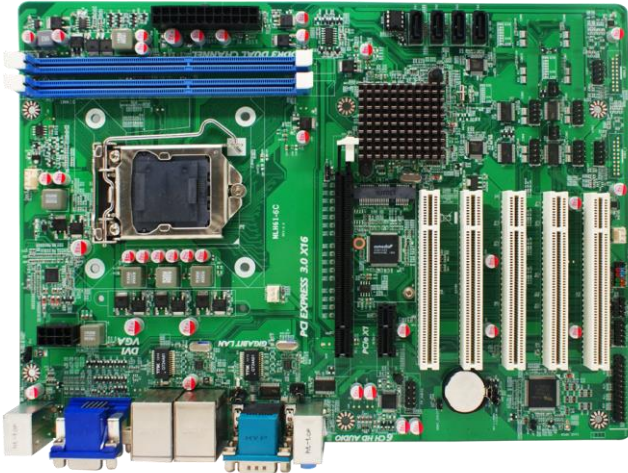

1. INTEL® H61 Chipset
2. Supports Intel LGA 1155 Socket 4th Generation Core™ i3, i5, i7 & Pentium Processors
3. Support DirectX 10.1 3D Graphics Acceleration
4. Support DDR3 1600/1333/1066
5. Integrated 6-CH HD Audio CODEC
6. Support 2*PCI Express Gigabit LAN
7. Onboard 1*MiniPCI-E
8. Support 1*PCI Express x16 slot
9. Support 5*PCI slots
10. Support 6*COM ports
11. 4Phase CPU Power Support
12. Support Thunder Protection Function
13. ATX Form Factor(305mm X220mm)

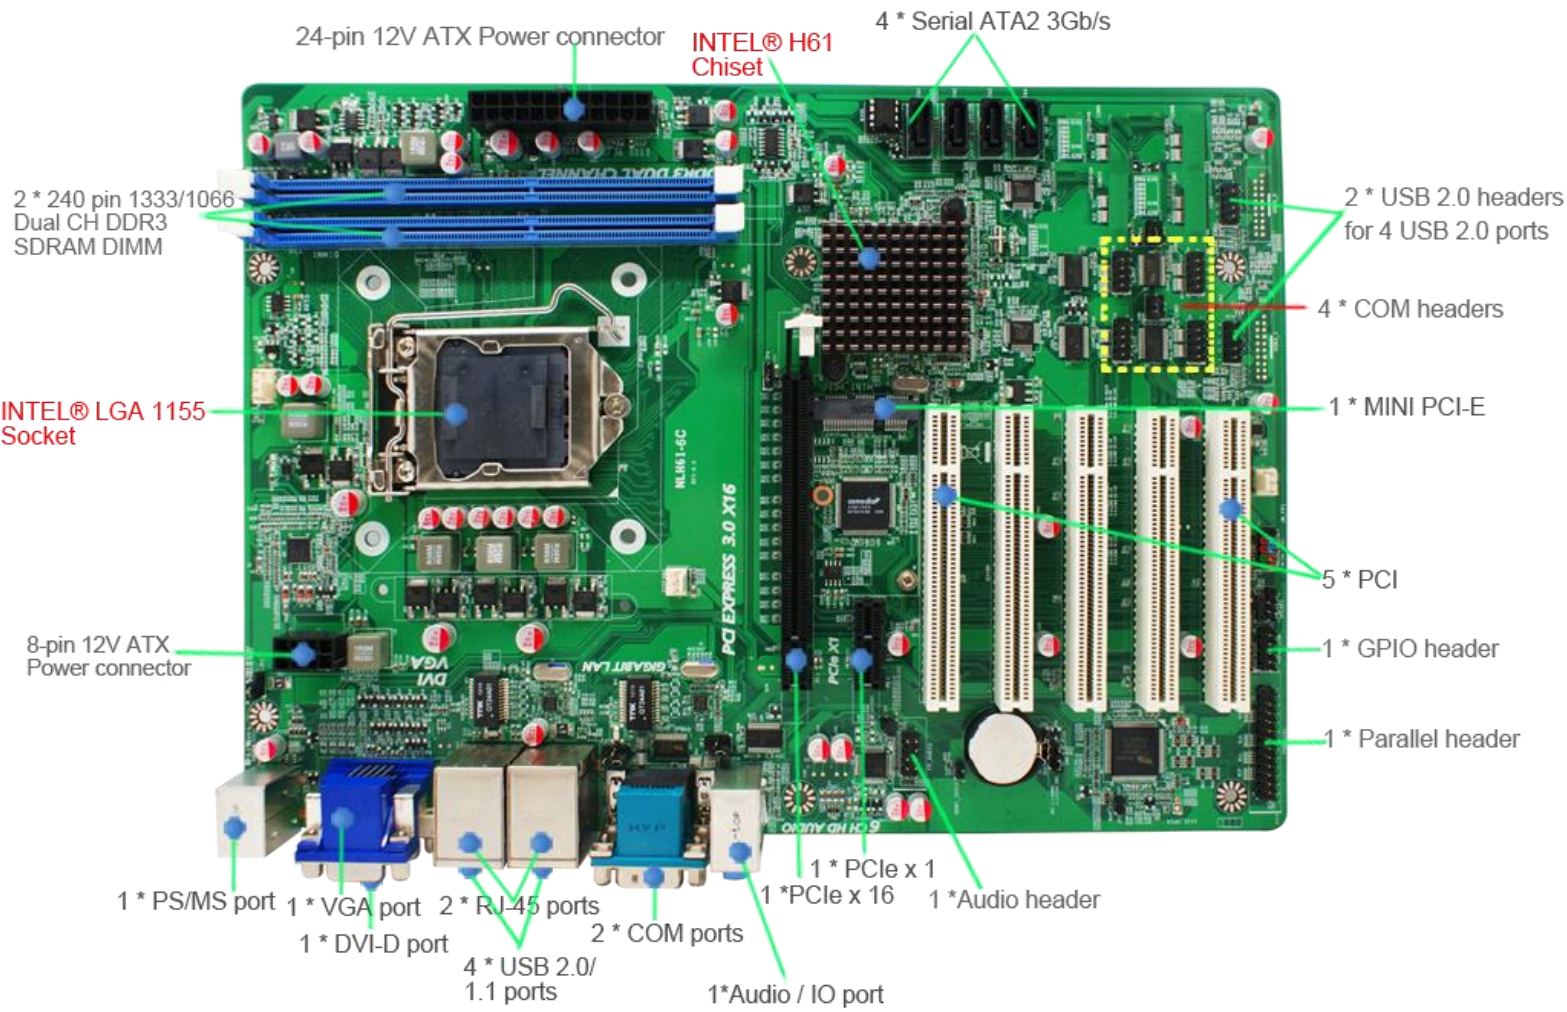

Mainboard Specifications

■ CPU	<ul style="list-style-type: none"> Supports Intel LGA 1155 Socket 4th Generation Core™ i3, i5, i7 & Pentium Processors 4 Phase CPU Power Support
■ Chipset	<ul style="list-style-type: none"> INTEL® H61 Chipset
■ I.O Chipset	<ul style="list-style-type: none"> Fintek® F71869A
■ Memory	<ul style="list-style-type: none"> 2* 240-pin DDR3 DIMM slots Support Dual Channel DDR3 memory technology Support DDR3 1600/1333/1066 Max. capacity of system memory up to 16GB
■ Expansion Slots	<ul style="list-style-type: none"> 1* Mini PCI-E 1* PClex1 slot 1* PClex16 slot 5* PCI slots
■ Storage	<ul style="list-style-type: none"> 4* Serial ATA2 3Gb/s connectors
■ Audio	<ul style="list-style-type: none"> ALC887 Audio CODEC 6CH HD Audio CODEC
■ Ethernet LAN	<ul style="list-style-type: none"> 2* Realtek® RTL8111G Chip PCI Express Gigabit LAN
■ USB	<ul style="list-style-type: none"> 8* USB 2.0/1.1(4distribute in back panel, 4 distribute in mid-board)
■ Special Features	<ul style="list-style-type: none"> Support CPU Smart Fan Support Watch dog Technology CPU Over-Temperature protection Over Current/Under Voltage protect Support 2*RS422/RS485 COM ports Thunder Protection Function All Solid Capacitor design
■ Back Panel I / O	<ul style="list-style-type: none"> 4* USB 2.0/1.1 ports 2* RJ-45 ports 1* PS/MS port 2* COM ports(1* Support RS422/RS485) 1* VGA port (Max. Resolution: 1920×1200@60Hz) 1* DVI port (Max. Resolution: 1920×1200@60Hz) 1* Audio / IO port
■ Internal I / O	<ul style="list-style-type: none"> 2* USB 2.0/1.1 headers for 4 USB 2.0/1.1 ports 4* COM headers(1* Support RS422/RS485) 1*HDMI-SPDIF header 1*Parallel header 1 *24-pin ATX 12V Power connector 1 *8-pin ATX 12V Power connector 1 *GPIO header

	<ul style="list-style-type: none">■ 1 *Mini PCI-e connector■ 1 * Audio header
■ BIOS	<ul style="list-style-type: none">■ AMI 32MB DIP Flash ROM
■ Form Factor	<ul style="list-style-type: none">■ ATX Form Factor(305mm X 220mm)
■ Accessories	<ul style="list-style-type: none">■ SATA cable■ COM Cable■ I/O Shield

*For further information please visit the website at <http://www.jetway.com.tw>

*The Specification may be changed without further notice.